


## TECHNICAL DATA – SELF LEVELLING PAVING RISER PEDESTAL ADJUSTABLE IN HEIGHT 65/95 mm



- Rotating head
- Overcomes slopes of up to 5%
- Can also create a 5% gradient

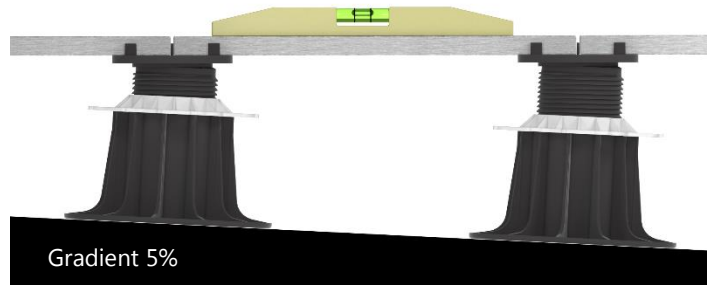

### Side View

Ø 120

65 mini / 95 maxi

Spacer thickness : 3mm  
Spacer height: 9mm  
Qty spacer : 4

### Top View

Ø 208

HD 20/30

JOUPLAST

### Crushing Test

MPL 128532-A and B		Pressure (N)
Screwed		>19954
Unscrewed		10015+/-1085

### Packaging

BAG		PALET
60 PIECES	16 KG	660 PIECES

### TECHNICAL DETAILS

- Product is fully recyclable
- Resists to acid substance
- Resists to weather conditions
- Resistance to extreme temperature from -30°C to +60°
- Conforms to EU regulations : DTU 43.1 for flat roofs
- Resistance to crushing test exceeds 500 kg
- Made from polypropylene

### GENERAL DATA

Conforms to EU Regulations for Flat Roof and for Gradient Roof made from holding masonry elements:

The riser is to be made of rigid material  
Contact zone with floor must be  $\geq 300 \text{ cm}^2$   
Large support surface:  $100 \text{ cm}^2$

Breaking resistance: The riser is studied to cope with 5.0 KN while a charging trial - charge uniformly distributed on the full riser section.

**MADE IN FRANCE**