


SELF LEVELLING CLEMAN® RISER

ADJUSTMENT IN HEIGHT
FROM 40 TO 230 mm



Patented System

100% recycled



ANC 40/55



ANC 55/80




ANC 80/130



ANC 130/230

TECHNICAL DETAILS

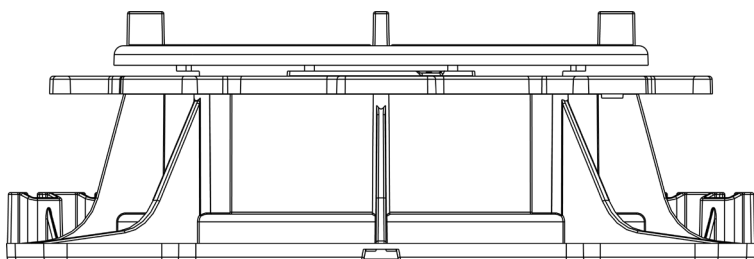

- › Material : recycled polypropylene
- › Colour : black, grey nut
- › Spacers thickness : 4 mm
- › Basis dimensions : 192 mm x 192 mm
- › Support surface diameter : 138 mm
- › Resistant to extreme temperature from -30°C to +60°C
- › UV and frost resistant
- › Resistance to crushing test exceeds 1 T

BENEFITS

- › Can be used to create - or compensate for -slopes of up to 5% on uneven ground.
- › Precise adjustments : riser can be either handly adjusted or with the JOUPLAST® adjustment key.
- › Performed lateral solution : 2 lateral integrated riser supports.
- › Optimized stability : all riser elements are mutually integrated.
- › Spacers can be split easily.
- › Cleman® accessories : 60 mm extension, side finishing plate, adjustment key and driver bit.

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.

PACKING

DNC 40/55	DNC 55/80	DNC 80/130	DNC 130/230
Box of 20 parts			Box of 8 parts

APPLICATIONS

- › To create terraces and patios with paving, ceramics, tiles, concrete slabs.



RECOMMANDATIONS

- › Terraces and patios for pedestrian use only.
- › Outdoor only.
- › Ceramic/Porcelain paving - T7, T11 or F+ standard.