



PAVING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 40 TO 230 mm / «ESSENTIAL» RANGE

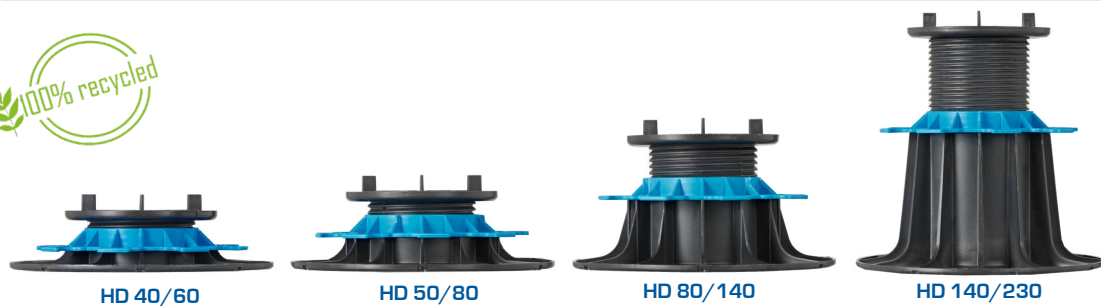

TECHNICAL DETAILS

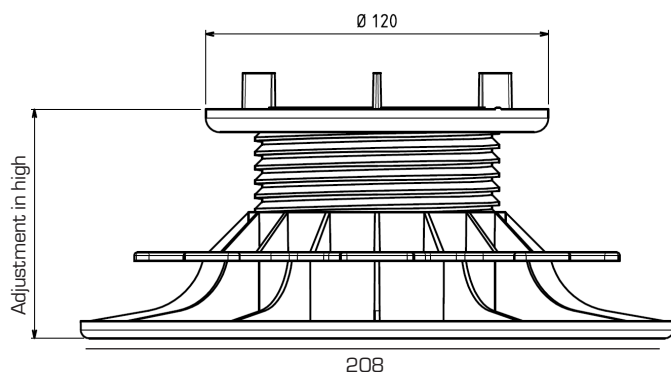

- › Material : Recycled polypropylene
- › Colour : black, blue nut
- › Spacers : Height : 9 mm / Thickness : 3 mm / Quantity : 4
- › Basis diameter : 208 mm
- › Support surface diameter : 120 mm
- › Resistance to extreme temperature from -30°C to +60°C
- › UV and frost resistant
- › Resistance to crushing test exceeds 1 T

APPLICATIONS

- › To create terraces and patios with paving, ceramics, tiles, concrete slabs or wooden grating.

LES + PRODUIT

- › Spacers can be split easily.
- › Suitable with JOUPLAST® accessories
(See compatibility table on our website).

PACKING

HD 40/60	HD 50/80	HD 80/140	HD 140/230
Bag of 60 parts	Bag of 60 parts	Bag of 40 parts	Bag of 40 parts
7 bag of 8 parts / box	6 bag of 8 parts / carton	3 bag of 8 parts / box	2 bag of 6 parts / box



RECOMMANDATIONS

- › Terraces and patios for pedestrian use only
- › Outdoor use only
- › Ceramic/Porcelain paving - T7, T11 or F+ standard
- › 40/60 mm Paving riser not compatible with 60 mm extension.

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.


PAVING RISER PEDESTAL

ADJUSTMENT IN HEIGHT 20/30MM

«ESSENTIAL» RANGE



TECHNICAL DETAILS

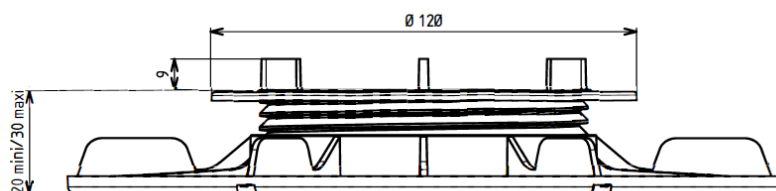

- › Material : recycled polypropylene
- › Colour : black
- › Adjustable height : mini.: 20 mm / maxi.: 30 mm
- › Spacers : Height : 9 mm / Thickness : 3 mm / Quantity : 4
- › Basis diameter : 208 mm
- › Support surface diameter : 120 mm
- › Weight : 0.155 kg
- › Resistance to extreme temperature from -30°C to +60°C
- › UV and frost resistant


APPLICATIONS

- › To create terraces and patios with paving, ceramics, tiles, concrete slabs or wooden grating.

BENEFITS

- › Spacers can be split easily.
- › Suitable with JOUPLAST® accessories (See compatibility table on our website).

TOP VIEW

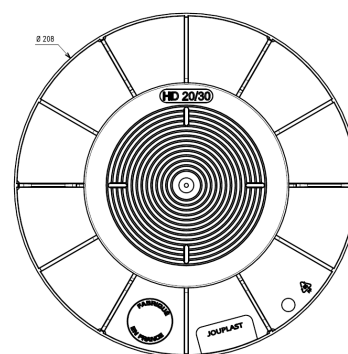

RESISTANCE

- › Resistance to crushing test exceeds 1 T.

PACKING

Available in box of 60 parts
[25 boxes per pallet]

Available in bag of 12 parts
[5 bags per box - 8 boxes per pallet
palette - Stackable pallet]

RECOMMENDATIONS

- › Terraces and patios for pedestrian use only.
- › Outdoor use only.
- › Ceramic/Porcelain paving - T7, T11 or F+ standard.
- › Do not use with side finishing plate.
- › For terrace lateral finishing, see directions for use.