



DELIMA®

Jouplast®

## FLEXIBLE BORDER EDGING STRIP - HEIGHT 4.5 CM



TECHNICAL DATA SHEET



### BENEFITS


- Invisible jointing system, and curvature resistance.
- Use to form curves or straight lines.
- Quick and easy installation with integrated assembly and interlocking system.
- Safe: this flexible material can be used safely in playgrounds.
- 8 anchoring stakes provided.
- Easily cut to length.

### APPLICATIONS

- Makes it possible to clearly separate distinct areas of landscaping (lawns, gravel, paving, paths, etc.)
- Can be used to retain concrete or cold mixed asphalt.

### RECOMMENDATIONS

- Do not use with hot mixed asphalt.
- When installing these edging strips in conjunction with Alveplac® and Greenplac®, which require the use of a vibrating compactor to compact the hardcore, we recommend the use of 250 x 8 mm metal stakes to avoid any possibility of vibration near the edging strip moving the plastic anchor stakes.
- For a 90° angle : a minimum of 12 cm of borders are needed.
- For fixing, use the anchoring stakes (8 provided).
- It is possible to use metal stakes - Diameter: 8 mm.
- For IFU, see the website.

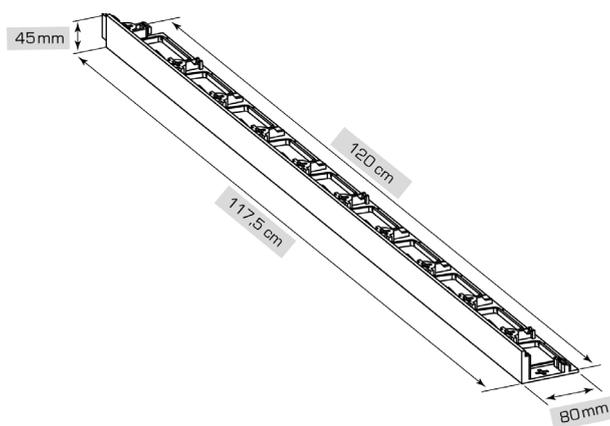

### TECHNICAL DETAILS

- Material: recycled polyolefin
- Colour: green and anthracite grey
- Usable dimensions: 235 cm [2 x 117.5 cm]
- Overall dimensions: 240 cm [2 x 120 cm]
- Weight: 1.060 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

### PACKING

- Box of 50 parts of 2.40 m / 4 boxes per pallet - POS included
- Box of 10 parts

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com



FL\_BORDER\_2403\_EN