



PAVING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 8 TO 20 MM
«ESSENTIAL» RANGE

TECHNICAL DATA SHEET



BENEFITS

- The smallest adjustable riser pedestal on the market.
- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.
- Divisible spacers for staggered laying.

APPLICATIONS


- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.
- Ideal for renovating.

RESISTANCE

- Resistance to crushing test exceeds 1T.

RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Millimetre-accurate notch-by-notch adjustment.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Paving riser pedestals should be used only on stabilised level ground or on existing concrete support.
- Not compatible with 10 mm, 25 mm & 60 mm extensions.
- Acoustic rubber cushion not included.
- For IFU, see the website.

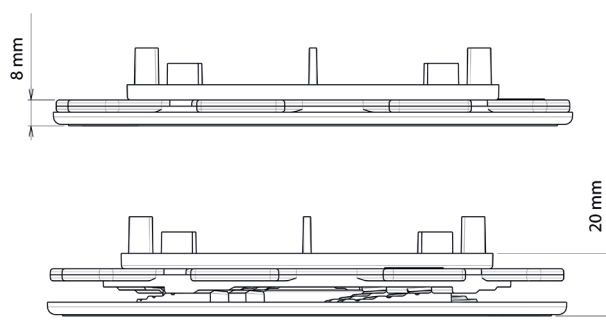

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Basis diameter: 170 mm
- Extension diameter: 122 mm
- Adjustable height: mini.: 8 mm / maxi.: 20 mm
- Spacer: height: 12 mm / thickness: 3 mm / qty: 4
- Weight: 155 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Box of 3 bags of 20 parts (16 boxes per pallet - Stackable)

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information at any time without warning.



www.jouplast.com



FT_100820_0304_EN