



Jouplast®

# DECKING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 8 TO 20 MM  
«ESSENTIAL» RANGE



## BENEFITS

- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.

## ✓ APPLICATIONS



- Ideal for creating natural wooden or composite decking for pedestrian use only.
- Ideal for renovating.

## 👍 RESISTANCE

- Resistance to crushing test exceeds 1T.

## 💡 RECOMMENDATIONS

- For pedestrian use only.
- Outdoor use only.
- The sub frame must be constructed using wooden or metallic material only (not composite).
- Millimetre-accurate notch-by-notch adjustment.
- Decking riser pedestals should be used only on stabilised ground or on existing concrete support.
- For IFU, see the website.

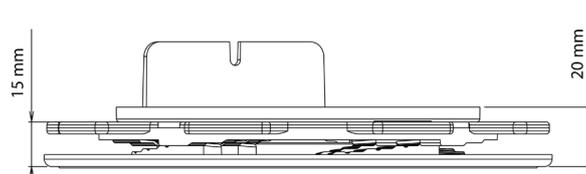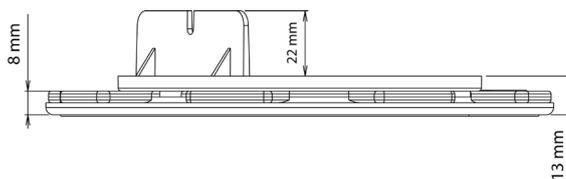

## 🔍 TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Basis diameter: 170 mm
- Extension diameter: 122 mm
- Adjustable height: mini.: 8 mm / maxi.: 20 mm
- Vertical lug height: 25 mm
- Weight: 0,170 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

## 📦 PACKING

- Box of 2 bags of 20 parts (16 boxes per pallet - Stackable)

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com

