



# PAVING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 20 TO 40 MM  
«ESSENTIAL» RANGE



TECHNICAL DATA SHEET



## BENEFITS

- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.
- Divisible spacers for staggered laying.

## APPLICATIONS


- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.

## RESISTANCE

- Resistance to crushing test exceeds 1T.

## RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m<sup>2</sup> to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Paving riser pedestals should be used only on stabilised level ground or on existing concrete support.
- Not compatible with the side finishing plate.
- Not compatible with 60 mm extension.
- Acoustic rubber cushion not included.
- For IFU, see the website.

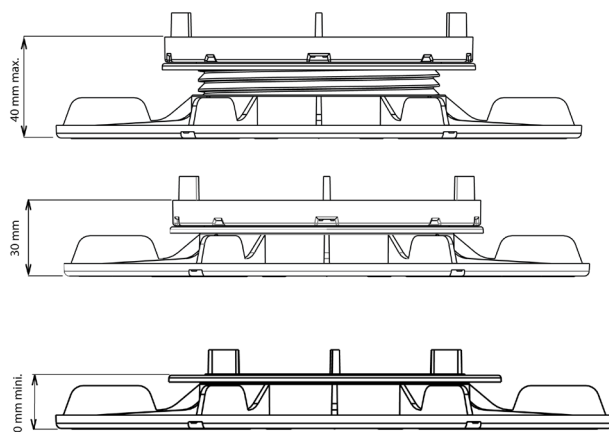

## TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Adjustable height: mini.: 20 mm / maxi.: 40 mm
- Spacer: height: 12 mm / thickness: 3 mm / qty: 4
- Basis diameter: 208 mm / Bearing contact area: 300 cm<sup>2</sup>
- Support surface diameter: 120 mm / Bearing contact area: 100 cm<sup>2</sup>
- Weight: 0,201 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

## PACKING

- Box of 50 parts

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com



FT\_102040\_2402\_EN