



# DECKING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 20 TO 40 MM  
«ESSENTIAL» RANGE

TECHNICAL DATA SHEET



## BENEFITS

- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.

## APPLICATIONS


- Ideal for creating natural wooden or composite decking for pedestrian use only.

## RESISTANCE

- Resistance to crushing test exceeds 1 T.

## RECOMMENDATIONS

- For pedestrian use only.
- Outdoor use only.
- The sub frame must be constructed using wooden or metallic material only (not composite).
- HL 20/40 mm decking riser is not compatible with 60 mm extension.
- Decking riser pedestals should be used only on stabilised ground or on existing concrete support.
- For IFU, see the website.

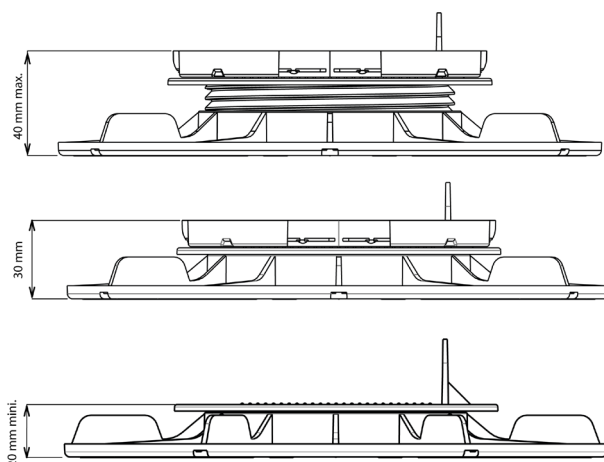

## TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Adjustable height: mini: 20 mm / maxi: 30 mm
- Basis diameter: 208 mm / Bearing contact area: 300 cm<sup>2</sup>
- Support surface diameter: 120 mm / Bearing contact area: 100 cm<sup>2</sup>
- Vertical lug height: 25 mm without extension / 15 mm with extension
- Weight: 0,208 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

## PACKING

- Box of 50 parts

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



[www.jouplast.com](http://www.jouplast.com)



FT\_HL\_2002\_2402\_EN