


HEIGHT 25MM FOR PAVING RISER PEDESTAL «ESSENTIAL» RANGE



BENEFITS

- Divisible spacers.

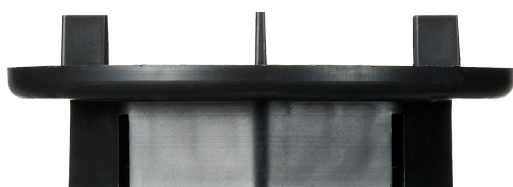

APPLICATIONS

- Extensions increase the height of riser pedestals.




RESISTANCE

- Resistance to crushing test exceeds 1T.



RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Only one extension possible, do not overlap.
- Used with risers of 40 mm minimum height.
- To be positioned on the riser head.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.

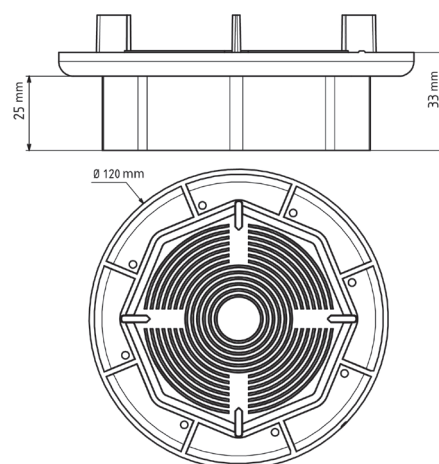

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Diameter: 120 mm
- Height: 25 mm
- Spacers: height: 12 mm / thickness: 3 mm
- Weight: 60 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant



PACKING

- Box of 120 parts (30 boxes of pallet)