



SELF LEVELLING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 29 TO 39 MM
«ESSENTIAL» RANGE



TECHNICAL DATA SHEET



BENEFITS

- Compensates and/or creates slopes of up to 5% on uneven ground.
- Pivoting head.
- Adapts to the irregularities of the ground.
- Divisible spacers for staggered laying.

APPLICATIONS


- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.
- The self-levelling riser is designed to accommodate differences in the surface below the pedestal, automatically correcting differences in height of up to 5% and irregularities in compacted hardcore.
- Can be used to create - or compensate for - slopes of up to 5% on uneven ground.

RESISTANCE

- Resistance to crushing test exceeds 1T.

RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Not compatible with 25 mm & 60 mm extensions.
- Not compatible with the side finishing plate.
- When the riser pedestal is used at its highest position, we recommend adding a 10 mm extension to provide greater flexibility during adjustment.
- Acoustic rubber cushion not included.
- For IFU, see the website.

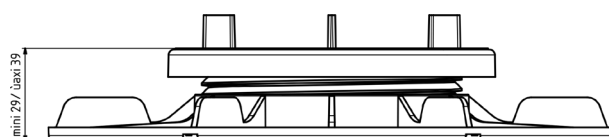

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Adjustable height: mini: 29 mm / maxi: 39 mm
- Spacer: height: 9 mm / thickness: 3 mm / qty: 4
- Basis diameter: 208 mm / Bearing contact area: 300 cm²
- Support surface diameter: 120 mm / Bearing contact area: 100 cm²
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Box of 60 parts (25 boxes per pallet)