

HEIGHT 60 MM FOR PAVING, SELF LEVELLING AND DECKING RISER PEDESTAL



BENEFITS

- Use the tags for an accurate installation.
- Stackable up to 4 extensions.

✓ APPLICATIONS


- Extensions increase the height of riser pedestals.

👍 RESISTANCE

- Resistance to crushing test exceeds 1T.

⚙️ RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Do not use more than 4 extensions.
- Not compatible with risers less than 50 mm high.
- Not compatible with 55/75 mm self levelling pedestal.
- To be placed between the base and the riser head.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.

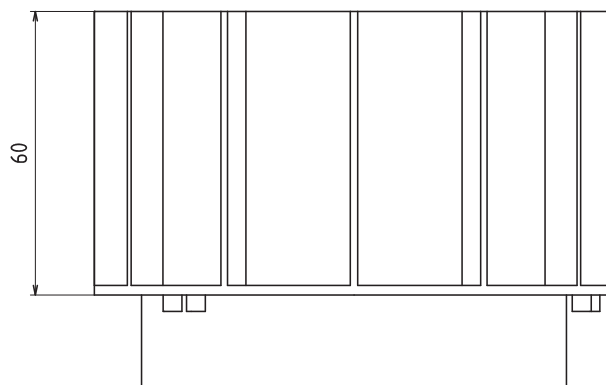

🔍 TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Diameter: 120 mm
- Height: 60 mm
- Weight: 80 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

📦 PACKING

- Bag of 60 parts (25 bags per pallet)
- Box of 5 bags of 8 parts (20 boxes per pallet - Stackable)