



BENEFITS

- Adjustment range from 14 to 20 mm.
- Saw teeth provide precise wedging.
- Compatible with flat shims.
- Ultra resistant.

✓ APPLICATIONS


- Can be used for all interior and exterior carpentry work and for packing wooden floors including decking and parquet.

👍 RESISTANCE

- Resistance to crushing test up to 2 T.

💡 RECOMMENDATIONS

- Can be screwed, glued or nailed.
- Fixing throughout the dedicated holes.
- Fixing with adapted glue [can be glued directly on the screed].

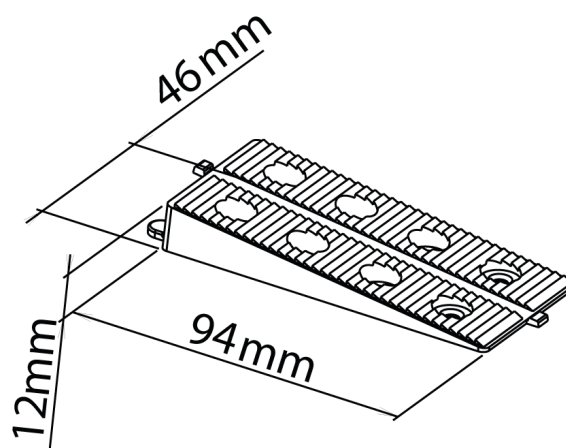

🔍 TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: grey
- Dimensions: 94 mm x 46 mm x 12 mm
- Fixing tabs: 7 mm / Quantity: 2
- Weight: 16,50 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

📦 PACKING

Bucket of 100 parts
[72 buckets per pallet - Stackable]

Mixed bucket H90 x 50 + H170 x 30
[72 buckets per pallet - Stackable]

Box of 8 bags of 30 parts
[24 boxes per pallet]