

HORIZONTAL JUNCTION ANGLE BRACKET



BENEFITS


- Slotted holes for accurate setting.
- 1000-hour salt spray corrosion resistance test.

✓ APPLICATIONS

- For reinforcing 90° joints.

💡 RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- To be used with the Profildeck® structure screws.
- For an easier installation, place the bracket between the outer low rail of the aluminium joist.
- Not compatible with the 27 mm Profildeck® aluminium joist.
- For IFU, see the website.

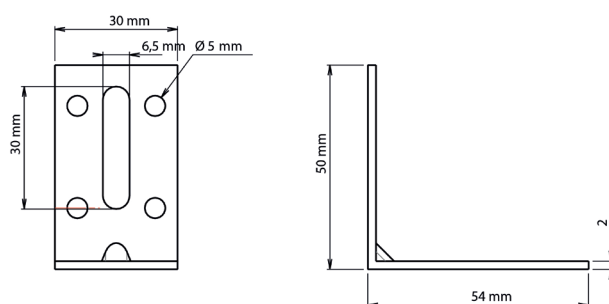

🔍 TECHNICAL DETAILS

- Material: zinc plated steel
- Weight: 37 g
- Dimensions: 50 mm x 54 mm / height: 30 mm
- Thickness: 2 mm

📦 PACKING

Box of 6 bags of 20 parts