

2,40 M ALUMINIUM JOIST HEIGHT: 27 MM



BENEFITS


- A single frame for 2 applications.
- Quick to install.
- The option to mix materials.
- Perfect for installing large format slabs (120x120 cm) and narrow slabs (20x120 cm, 30 x 120 cm...).
- 1000-hour salt spray corrosion resistance test.
- The design of the joist makes it easier for rainwater to drain away.

APPLICATIONS

- Self-supporting structure terrace perfect for renovation or for low projects.
- Double-sided aluminium joist for construction of wooden and composite decking and paved terraces.

RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- For use with all «Essentiel» riser pedestals, with the exception of the 8/20 mm paving riser pedestal.
- Not compatible with Profildeck® H55 angle brackets.
- Not compatible with Profildeck® T-piece for lateral finishing.
- For IFU, see the website.

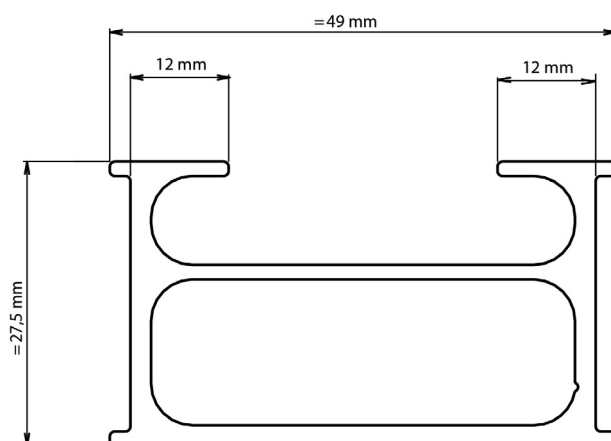

TECHNICAL DETAILS

- Material: 80% recycled aluminum
- Two-sided: a single reference for all surfaces
- Length: 2,40 m
- Paving side: 12 mm support
- Paving side: joist + adapter + rubber tape = 35 mm
- Decking side: joist + adapter + the anti-condensation tape = 33 mm
- Weight: 0.835 kg / linear meter
- Resistance to temperature from -30°C to +60°C
- 100% recyclable

PACKING

- Packed by 4 parts (10 sets per pallet)