

ADJUSTMENT IN HEIGHT FROM 130 TO 230  
MM



## BENEFITS


- The CLEMAN® range allows you to prepare the site by pre-setting the riser pedestals using the driver bit, use the screw adjuster to set the riser pedestal height, and carry out the final millimetres of adjustment using the special adjustment key.
- Performed lateral solution: 2 lateral integrated riser supports.
- A square base makes it easy to lay paving at an angle.
- Rubber damper included.
- Divisible spacers for staggered laying.
- Optimised stability: all the riser elements are mounted together.
- Cleman® accessories : 60 mm extension, side finishing plate, adjustment key and driver bit.

## APPLICATIONS

- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.
- The self-levelling riser is designed to accommodate differences in the surface below the pedestal, automatically correcting differences in height of up to 5% and irregularities in compacted hardcore.
- Can be used to create - or compensate for - slopes of up to 5% on uneven ground.

## RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m<sup>2</sup> to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Paving riser pedestals should be used only on uneven ground or on existing concrete support.
- When the riser pedestal is used at its highest position, we recommend adding a 10 mm extension to provide greater flexibility during adjustment.
- When the riser pedestal is used at its lowest position, we recommend using the rised pedestal of the next size down, adding a 10 mm extension for greater flexibility when adjusting.
- For IFU, see the website.

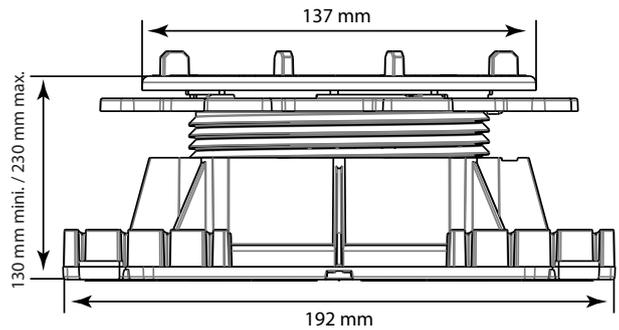

## TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black, grey nut
- Adjustable height: mini.: 130 mm / maxi.: 240 mm
- Spacer thickness: 4 mm
- Dimensions of the base: 192 mm x 192 mm - Bearing contact area: 300 cm<sup>2</sup>
- Support surface diameter: 137 mm - Bearing contact area: 100 cm<sup>2</sup>
- Weight: 712 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

## PACKING

- Box of 8 parts (18 boxes per pallet - Stackable)

## RESISTANCE

- Resistance to crushing test exceeds 1T.