



BENEFITS

- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.
- Divisible spacers for staggered laying.

APPLICATIONS


- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.

RESISTANCE

- Resistance to crushing test exceeds 1T.

RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Paving riser pedestals should be used only on stabilised level ground or on existing concrete support.
- Compatible with the "Essentiel" paved side finishing plate for heights of 27 mm and above.
- Not compatible with 60 mm extension.
- Acoustic rubber cushion not included.
- For IFU, see the website.

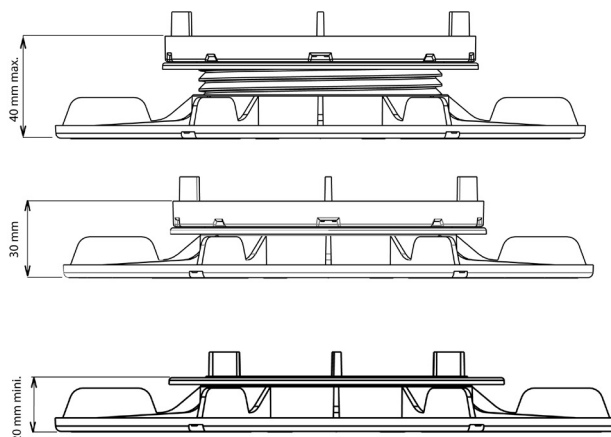

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Adjustable height: mini.: 20 mm / maxi.: 40 mm
- Spacer: height: 12 mm / thickness: 3 mm / qty: 4
- Basis diameter: 208 mm / Bearing contact area: 300 cm²
- Support surface diameter: 120 mm / Bearing contact area: 100 cm²
- Weight: 0,201 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Box of 50 parts