


GRAVEL STABILISATION MAT - 30MM - DOUBLE FOR LANDSCAPING AREA

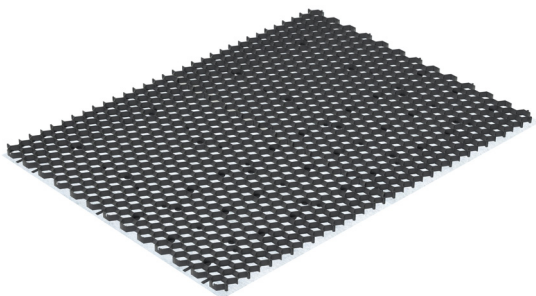

BENEFITS

- Retains gravel.
- Ensures rapid drainage of rainwater.
- Geotextile membrane included (60 g/m²) and permanently bonded to the cells.
- Prevents ruts.
- Integrated assembly system prevents mats from separating.
- Can be used for vehicles with axle loadings of up to 20 tonnes and access for firefighters.
- Easy handling : light product.
- Can be installed on slopes up to 15% for pedestrian areas and 10% for vehicle use.

APPLICATIONS


- Provides a stable platform for gardens, paths and pedestrian areas.
- Perfect for private parking, driveways and gravel access roads.
- Perfect for public, community, commercial, industrial use and for emergency vehicle access.
- Offers an aesthetic finish (product invisible at the end of the site).

RESISTANCE

- Resistance (filled) : 650T/m²

RECOMMENDATIONS

- To provide the stated load resistance, Gravelstab® cells must be filled with gravel, plus an additional 2 cm top layer (Gravel raking should be necessary occasionally).
- Fill using 5-15 mm or 8-16 mm gravel.
- For heavy traffic in urban area, It is recommended to use our reference Urbangravel®.
- Do not use with hot mixed asphalt.
- For IFU, see the website.

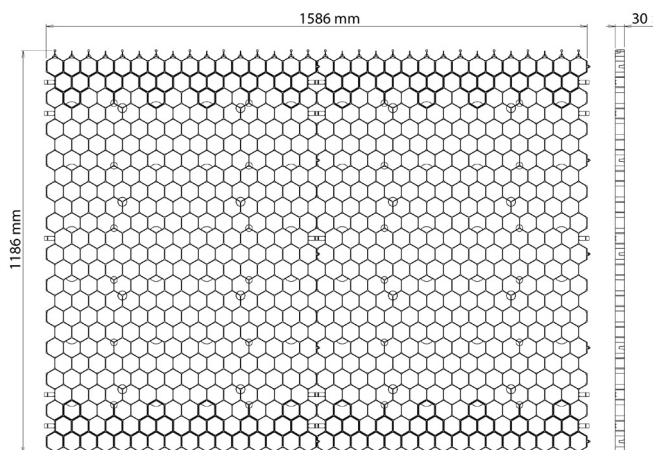

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: grey (the colour may vary according to the raw material supplied)
- Usable dimensions: 1186 mm x 1586 mm
- Height: 30 mm (± 3 mm)
- Wall thickness: ± 1.2 mm
- Usable area: 1.8810 m²
- Weight: 2.8 kg ie 1.4886 kg/m²
- Cell structure: Hexagonal (honeycomb) / Diameter: 51 mm
- Membrane: Geotextile 60g/m² - permanently bonded to the cells
- Volume/gravel weight per sqm²: 42 liters - 63 kg
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Pallet of 21 parts (stackable)

CONFORMITY

- Meets the required puncture-resistance rating of 80 N/cm² for fire access routes.

COMPLEMENTARY PRODUCTS

DELIMA®

GREENPLAC®