

FOR PAVING RISER PEDESTAL «ESSENTIAL» RANGE



BENEFITS


- No additional tools.
- Invisible fixing of the plinth.
- Patented glue trap system.
- Spacers can be split using a tool.
- Compatible with Jouplast® finishing profiles.

APPLICATIONS

- Provides a neatly edge finishing of terraces built on riser pedestals (with or without paving tile cutting).
- Along the wall, it supports and stabilises the slab specially cut to size for attachment to the wall.
- Used on terrace edges and corners in combination with the lateral riser support, it provides vertical support for a plinth.
- Allows different configurations: with a finishing profile, finish with a plint, invisible finishing, to create a step.

RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- To be placed on the riser head.
- Provide one side finishing plate per periphery riser.
- For corner covering, use only on one side finishing plate.
- Raises the height of the riser by 13 mm.
- Cannot be used with «Essential» standard HD 8/20 and with self-levelling «Essential» risers. Can be used in combination with the HD 20/30 standard adjustable riser pedestal and with the combination of HD 20/30 + HD 10 mm height extender.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m² to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- For IFU, see the website.

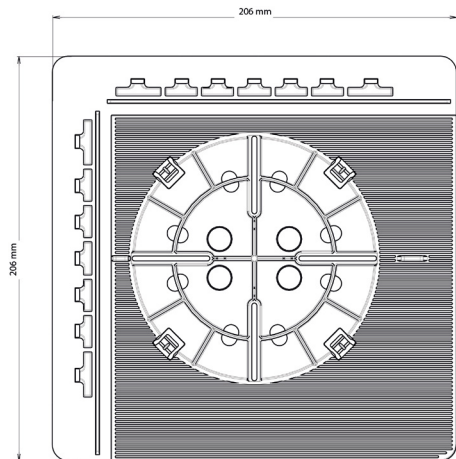

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Dimensions: 206 mm x 206 mm
- Spacers thickness: 3 mm
- Weight: 211 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Box of 10 parts (75 boxes per pallet - stackable)